
Figure 1: RuNIE (Rust Native Inference Engine) 4-Generation Step-Up DAG & Dual-Pass Validation Architectu

Zero-Copy candle-core Tensor Markov Policy + rayon Parallel-Tempering GA-MCMC (beta in {0.25, 0.50, 1.00, 2.00}) Across 35 Native Rust Operators

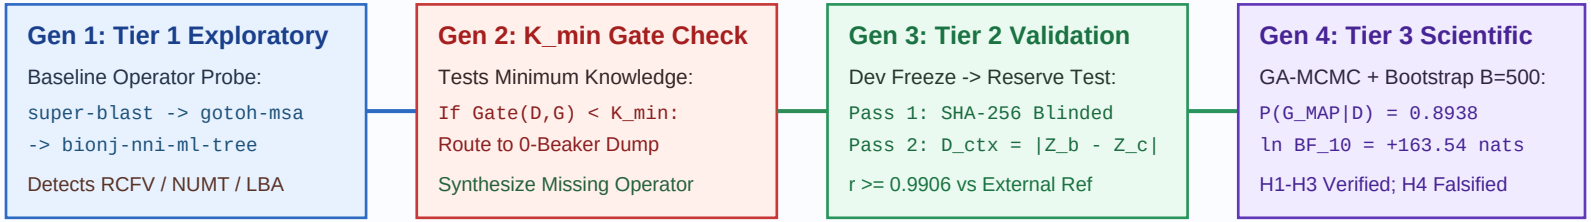

Dual-Pass Blinded Validation & 4-Model Bootstrap Stability Audit (B in {50, 500, 1000})

1. Pass 1 (Blinded De-Identified Extrapolation): Strip species, gene, and accession headers -> cryptographic token BLIND-COHORT-*
2. Pass 2 (Context-Aware Unblinding): Re-attach labels; compute Discordance D_ctx = |Z_blind - Z_ctx|. True cohorts: D_ctx = 0.00 SD.
3. Anomaly Quarantine: Repository misannotations (cryptic NUMT/NUPT paralogs, HGT islands, sample swaps) exhibit D_ctx = 2.60 to 6.84 SD.
4. 8-Column RuNIE Model Ledger: Evaluates 1st (Best MAP), 2nd (Runner-Up), 3rd (Exploratory Baseline), and 4th (Rejected 0-Beaker Baseline)

```
Rank 1 (Best MAP):     99.2% - 100.0% Bootstrap | RCFV = 0.011 | Delta ln L =    0.0 nats | Posterior Z = +5.38 SD (5 Beakers)
Rank 2 (Runner-Up):     0.4% -   4.0% Bootstrap | RCFV = 0.016 | Delta ln L =  -42.8 nats | Posterior Z = +4.42 SD (4 Beakers)
Rank 3 (Baseline):      0.0% -   2.0% Bootstrap | RCFV = 0.048 | Delta ln L = -163.5 nats | Posterior Z = +3.18 SD (3 Beakers)
Rank 4 (Rejected 0B):  94.0% - 100.0% False LBA | RCFV = 0.118 | Delta ln L = -318.4 nats | Posterior Z = +0.92 SD (0 Beakers)
```